

MARTE A.O.




蓝色PVC软管，象牙色防震硬质PVC螺旋增强 机械性能优异：重量轻，柔韧性、抗弯性和耐候性优异，耐磨损；防静电版本带铜线。

- 适用于抽吸输送润滑油、原油(汽油和柴油)。

Blue hose in special antimigration PVC compound reinforced with an anti-shock rigid PVC spiral. High mechanical properties, light, flexible, really good bending, resistant to abrasion and weather conditions. Antistatic version with copper wire on request.

- Suction and delivery of lubricants, crude oils (naphta and diesel oil).

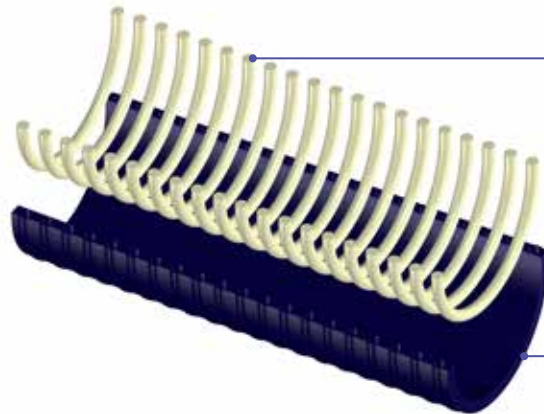

防震硬质PVC螺旋
Anti-shock rigid PVC spiral

PVC复合物
Antimigration PVC compound

技术参数 / Technical data

| 代码 | 内径 | 最小壁厚 | 最大壁厚 | 重量 | 工作压力 | 爆破压力 | 耐负压 | 弯曲半径 | 每卷长度 | 体积 |
|-------------------|--------|--------------|---------------|--------|------|------|--------------------|---------|------------|----------------|
| Code | Ins. Ø | Min wall th. | Max. wall th. | Weight | WP | BP | Vac. | Bending | Coil lgth. | Vol. |
| | mm | mm | mm | g/m | bar | bar | m H ₂ O | mm | m | m ³ |
| MT 01 019.0 000.0 | 19,1* | 19,1 | 4,0 | 390 | 8 | 24 | 10 | 140 | 50 | 0,089 |
| MT 01 020.0 000.0 | 20* | 20 | 4,0 | 400 | 8 | 24 | 10 | 140 | 50 | 0,092 |
| MT 01 025.0 000.0 | 25* | 25 | 4,3 | 530 | 8 | 24 | 10 | 170 | 50 | 0,109 |
| MT 01 030.0 000.0 | 30* | 30 | 4,4 | 640 | 8 | 24 | 10 | 195 | 50 | 0,151 |
| MT 01 032.0 000.0 | 31,8* | 31,8 | 4,4 | 670 | 8 | 24 | 10 | 205 | 50 | 0,158 |
| MT 01 035.0 000.0 | 35* | 35 | 4,4 | 730 | 7 | 21 | 10 | 220 | 50 | 0,171 |
| MT 01 038.0 000.0 | 38,1* | 38,1 | 4,4 | 790 | 7 | 21 | 10 | 235 | 50 | 0,206 |
| MT 01 040.0 000.0 | 40* | 40 | 4,3 | 810 | 7 | 21 | 10 | 250 | 50 | 0,214 |
| MT 01 045.0 000.0 | 45* | 45 | 4,4 | 910 | 6 | 18 | 10 | 275 | 50 | 0,236 |
| MT 01 050.0 000.0 | 50* | 50 | 4,9 | 1130 | 6 | 18 | 10 | 300 | 50 | 0,349 |
| MT 01 052.0 000.0 | 50,8* | 50,8 | 4,9 | 1150 | 6 | 18 | 10 | 300 | 50 | 0,354 |
| MT 01 055.0 000.0 | 55* | 55 | 5,3 | 1370 | 6 | 18 | 10 | 330 | 50 | 0,384 |
| MT 01 060.0 000.0 | 60* | 60 | 5,4 | 1510 | 6 | 18 | 10 | 355 | 50 | 0,517 |
| MT 01 063.0 000.0 | 63,5* | 63,5 | 5,6 | 1640 | 6 | 18 | 10 | 370 | 50 | 0,544 |
| MT 01 070.0 000.0 | 70* | 70 | 5,8 | 1850 | 5 | 15 | 10 | 410 | 50 | 0,846 |
| MT 01 076.0 000.0 | 76,2* | 76,2 | 5,8 | 2000 | 5 | 15 | 10 | 440 | 50 | 0,909 |
| MT 01 080.0 000.0 | 80* | 80 | 5,9 | 2130 | 5 | 15 | 10 | 460 | 30/50 | 0,716 / 0,954 |
| MT 01 090.0 000.0 | 90* | 90 | 6,2 | 2520 | 4 | 12 | 10 | 530 | 30 | 0,797 |
| MT 01 100.0 000.0 | 100* | 100 | 7,1 | 3220 | 4 | 12 | 9 | 600 | 30 | 0,889 |
| MT 01 102.0 000.0 | 102* | 102 | 7,1 | 3280 | 4 | 12 | 9 | 600 | 30 | 0,905 |
| MT 01 110.0 000.0 | 110* | 110 | 7,2 | 3560 | 4 | 12 | 9 | 690 | 30 | 0,968 |
| MT 01 127.0 000.0 | 127* | 127 | 7,3 | 4140 | 4 | 12 | 9 | 800 | 30 | 1,466 |
| MT 01 150.0 000.0 | 151,5* | 151,5 | 9,0 | 6200 | 3 | 9 | 8,5 | 1300 | 20 | 1,372 |
| MT 01 152.0 000.0 | 152,4* | 152,4 | 9,0 | 6230 | 3 | 9 | 8,5 | 1300 | 20 | 1,379 |
| MT 01 203.0 000.0 | 203,2* | 203,2 | 10,7 | 10030 | 2 | 6 | 7 | 1200 | 10 | 1,826 |

* 如有需求，请与我们的销售办公室联系，以获得更多的信息和数据 / *Available on request, contact our sales office for more info and quantities

以上的报告技术数据均温度23°C，50%湿度下测量的 / The technical data here reported were measured at 23°C with 50% humidity