

# PLUTONE A




## 透明PVC软管，螺旋钢丝增强

- 抽吸输送食品液体，饮料，果汁，葡萄酒以及酒精浓度高达20%的酒类饮品的理想方案；通常多应用于灌装机和分配器。符合Reg. EU 10/2011 (classes A, B, C)食品级标准，可输送食品。

### Transparent PVC hose reinforced with a steel spiral.

- Ideal solution for suction and delivery of food liquids, beverages, fruit juices, wine and liquors with up to 20% alcohol concentration. It is often used for filling machines and dispensers. Suitable to deliver foodstuffs according to Reg. EU 10/2011 (classes A, B, C)

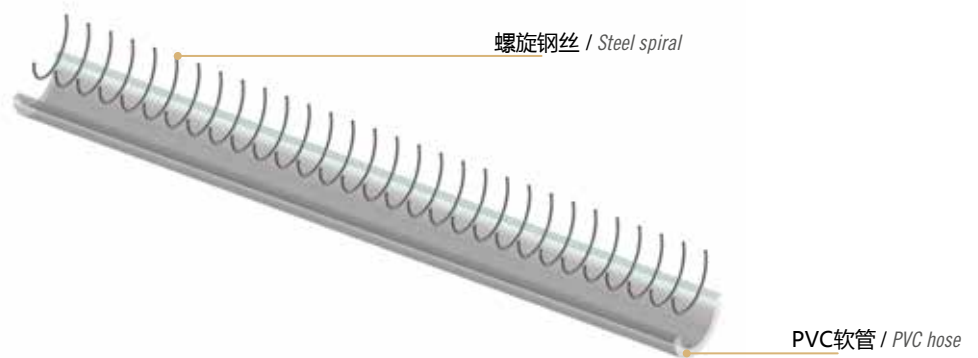

### 技术参数 / Technical data

代码 Code	内径 Ins. $\phi$	外径 Out $\phi$	重量 Weight	工作压力 WP	爆破压力 BP	耐负压 Vac.	弯曲半径 Bending	每卷长度 Coil lgth.	体积 Vol.
	mm	mm	g/m	bar	bar	m H <sub>2</sub> O	mm	m	m <sup>3</sup>
PY 01 006.0 012.2	6	12,2	130	5,0	25	9,5	30	60	0,019
PY 01 008.0 014.2	8	14,2	155	5,0	25	9,5	40	60	0,024
PY 01 010.0 016.0	10	16	175	5,0	25	9,5	50	60	0,028
PY 01 012.0 018.0	12	18	200	5,0	25	9,5	50	60	0,033
PY 01 014.0 020.0	14	20	230	5,0	25	9,5	60	60	0,039
PY 01 016.0 022.4	16	22,4	270	5,0	25	9,5	70	60	0,048
PY 01 018.0 024.4	18	24,4	295	5,0	25	9,5	80	60	0,070
PY 01 020.0 027.0	20	27	355	5,0	25	9,5	90	60	0,086
PY 01 022.0 029.0	22	29	385	5,0	25	9,5	100	60	0,093
PY 01 025.0 033.0	25	33	510	4,0	20	8,5	110	60	0,127
PY 01 030.0 038.0	30	38	595	4,0	20	8,5	140	60	0,146
PY 01 032.0 040.4	32	40,4	655	4,0	20	8,5	140	60	0,155
PY 01 035.0 043.4	35	43,4	710	4,0	20	8,5	160	60	0,167
PY 01 038.0 047.0	38	47	815	4,0	20	8,5	170	30	0,120
PY 01 040.0 049.0	40	49	855	4,0	20	8,5	180	30	0,125
PY 01 045.0 054.8	45	54,8	1115	4,0	20	8	200	30	0,175
PY 01 050.0 060.0	50	60	1250	4,0	20	8	230	30	0,259
PY 01 060.0 071.8	60	71,8	1725	3,6	18	8	270	30	0,310
PY 01 063.0 074.8	63	74,8	1825	3,6	18	8	280	30	0,323
PY 01 070.0 082.0	70	82	2045	3,6	18	7	320	30	0,354
PY 01 076.0 088.2	76	88,2	2240	3,6	18	7	340	30	0,381
PY 01 080.0 092.2	80	92,2	2370	3,6	18	7	360	20	0,398
PY 01 090.0 103.0	90	103	3040	3,0	15	7	410	20	0,527
PY 01 102.0 115.0	102	115	3410	2,4	12	7	460	20	0,589
PY 01 105.0 118.0	105*	118	3505	2,4	12	7	470	20	0,604
PY 01 110.0 127.4	110	127,4	4855	1,6	8	9,0	550	20	0,652
PY 01 120.0 137.4	120	137,4	5265	1,2	6	9,0	600	20	1,055
PY 01 127.0 144.4	127	144,4	5590	1,2	6	9,0	640	20	1,109
PY 01 150.0 168.6	151	168,6	6980	1,2	6	9,0	760	20	1,303

\* 如有需求，请与我们的销售办公室联系，以获得更多的信息和数据/ \*Available on request, contact our sales office for more info and quantities  
以上技术数据均在温度23°C，50%湿度下测量的 / The technical data here reported were measured at 23°C with 50% humidity