

APOLLO SUPERFLEX




黑色聚氯乙烯/丁腈橡胶(PVC/NBR)软管，象牙色防震硬质PVC螺旋增强 因其特殊配方，极端温度下仍保持灵活性，优于同类型PVC软管；可根据需求提供防静电版本。

• 适用于废料处理，农业中液体的抽吸和输送。

Black PVC/NBR hose, reinforced with an anti-shock rigid PVC spiral. Special formulation conceived for keeping the flexibility at extreme temperatures, better than similar PVC hoses commonly used. Antistatic version with copper wire on request.

• Waste Management, agriculture: suction and transport of liquids.

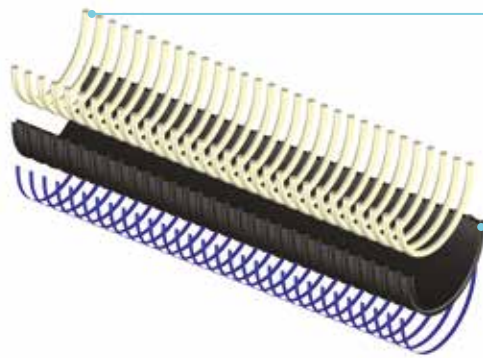

防震硬质PVC软管
Anti-shock rigid PVC spiral

PVC/NBR软管 / PVC/NBR hose

技术参数 / Technical data

| 代码 Code | 内径 Ins. Ø | 最小壁厚 Min wall th. | 最大壁厚 Max. wall th. | 重量 Weight | 工作压力 WP | 爆破压力 BP | 耐负压 Vac. | 弯曲半径 Bending | 每卷长度 Coil lgth. | 体积 Vol. |
|-------------------|--------------|----------------------|-----------------------|--------------|------------|------------|--------------------|-----------------|--------------------|----------------|
| | mm | mm | mm | g/m | bar | bar | m H ₂ O | mm | m | m ³ |
| AS 01 025.0 000.0 | 25 | 3,4 | 3,8 | 400 | 3 | 15 | 8 | 80 | 50 | 0,082 |
| AS 01 030.0 000.0 | 30* | 3,9 | 4,3 | 550 | 3 | 15 | 8 | 100 | 50 | 0,124 |
| AS 01 032.0 000.0 | 31,8 | 3,9 | 4,3 | 580 | 3 | 15 | 8 | 105 | 50 | 0,129 |
| AS 01 035.0 000.0 | 35* | 3,9 | 4,4 | 630 | 2,6 | 13 | 8 | 115 | 50 | 0,140 |
| AS 01 038.0 000.0 | 38,1 | 4,0 | 4,5 | 700 | 2,6 | 13 | 8 | 125 | 50 | 0,181 |
| AS 01 040.0 000.0 | 40* | 4,0 | 4,5 | 730 | 2,4 | 12 | 8 | 130 | 50 | 0,188 |
| AS 01 045.0 000.0 | 45* | 4,1 | 4,7 | 850 | 2,4 | 12 | 8 | 145 | 50 | 0,244 |
| AS 01 050.0 000.0 | 50* | 4,2 | 5,2 | 1010 | 2 | 10 | 8 | 160 | 50 | 0,348 |
| AS 01 052.0 000.0 | 50,8 | 4,2 | 5,2 | 1020 | 2 | 10 | 7 | 160 | 50 | 0,353 |
| AS 01 055.0 000.0 | 55* | 4,3 | 5,4 | 1150 | 2 | 10 | 7 | 180 | 50 | 0,379 |
| AS 01 060.0 000.0 | 60* | 4,5 | 5,6 | 1310 | 2 | 10 | 7 | 195 | 50 | 0,513 |
| AS 01 063.0 000.0 | 63,5 | 4,5 | 5,7 | 1400 | 2 | 10 | 7 | 210 | 50 | 0,539 |
| AS 01 065.0 000.0 | 65* | 4,5 | 5,7 | 1430 | 1,8 | 9 | 7 | 210 | 50 | 0,550 |
| AS 01 070.0 000.0 | 70* | 4,5 | 6,1 | 1550 | 1,8 | 9 | 7 | 225 | 50 | 0,710 |
| AS 01 076.0 000.0 | 76,2 | 4,6 | 6,1 | 1700 | 1,8 | 9 | 7 | 250 | 50 | 0,764 |
| AS 01 080.0 000.0 | 80* | 4,6 | 6,6 | 1860 | 1,6 | 8 | 7 | 260 | 50 | 0,805 |
| AS 01 090.0 000.0 | 90* | 4,7 | 6,8 | 2150 | 1,5 | 7,5 | 7 | 300 | 30 | 0,530 |
| AS 01 100.0 000.0 | 100* | 5,3 | 7,6 | 2640 | 1,3 | 6,5 | 7 | 330 | 30 | 0,589 |
| AS 01 102.0 000.0 | 102 | 5,3 | 7,6 | 2690 | 1,3 | 6,5 | 6 | 335 | 30 | 0,599 |
| AS 01 105.0 000.0 | 105* | 5,3 | 7,6 | 2760 | 1,2 | 6 | 6 | 350 | 30 | 0,922 |
| AS 01 110.0 000.0 | 110* | 5,5 | 7,9 | 3000 | 1,2 | 6 | 6 | 360 | 30 | 1,286 |
| AS 01 120.0 000.0 | 120* | 5,6 | 8,0 | 3310 | 1,1 | 5,5 | 6 | 390 | 30 | 1,391 |
| AS 01 127.0 000.0 | 127 | 5,7 | 8,1 | 3560 | 1,1 | 5,5 | 6 | 410 | 30 | 1,464 |
| AS 01 130.0 000.0 | 130* | 5,7 | 8,2 | 3680 | 1,1 | 5,5 | 6 | 420 | 30 | 1,497 |
| AS 01 150.0 000.0 | 151,5* | 6,5 | 9,4 | 4980 | 0,9 | 4,5 | 6 | 500 | 20 | 1,361 |
| AS 01 152.0 000.0 | 152,4 | 6,6 | 9,4 | 5030 | 0,9 | 4,5 | 6 | 500 | 20 | 1,368 |
| AS 01 160.0 000.0 | 160* | 7,1 | 10,2 | 5590 | 0,9 | 4,5 | 6 | 540 | 20 | 1,442 |
| AS 01 200.0 000.0 | 200* | 9,4 | 13,4 | 9690 | 0,7 | 3,5 | 5 | 700 | 10 | 1,813 |
| AS 01 203.0 000.0 | 203,2* | 9,4 | 13,4 | 9840 | 0,7 | 3,5 | 5 | 700 | 10 | 1,838 |

* 如有需求，请与我们的销售办公室联系，以获得更多的信息和数量 / *Available on request, contact our sales office for more info and quantities

以上报告的技术数据均在温度23°C，50%湿度下测量 / The technical data here reported were measured at 23°C with 50% humidity