


APOLLO SE




PVC软管, 象牙色防震硬质PVC螺旋增强 浅蓝色带红色挤压线圈, 即使在低温环境下, 软管仍保持灵活性; 可根据需求提供防静电带铜线版本。

• 适用于废料处理, 农业中, 抽吸输送液体; 也特别适合用在罐车上。

PVC hose reinforced with an ivory anti-shock rigid PVC spiral. Light blue with an extruded red stripe, it's flexible even at low temperatures. On request, it can be manufactured in antistatic version with copper wire.

• Waste Management, agriculture: suction and transport of liquids. Particularly suitable to be used on tank trucks.

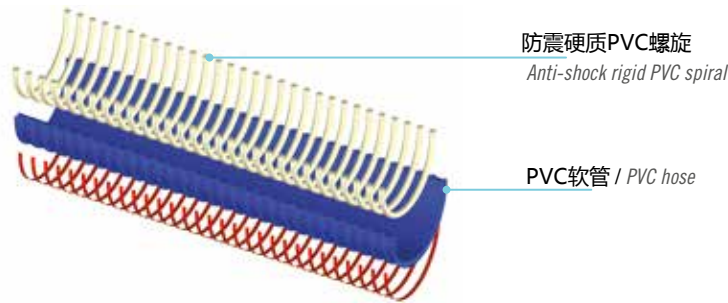

防震硬质PVC螺旋

Anti-shock rigid PVC spiral

PVC软管 / PVC hose

技术参数 / Technical data

代码	内径	最小壁厚	最大壁厚	重量	工作压力	爆破压力	耐负压	弯曲半径	每卷长度	体积
Code	Ins. Ø	Min wall th.	Max. wall th.	Weight	WP	BP	Vac.	Bending	Coil lgth.	Vol.
	mm	mm	mm	g/m	bar	bar	m H ₂ O	mm	m	m ³
AX 01 019.0 000.0	19,1*	3,2	3,6	290	7	21	10	80	50	0,057
AX 01 020.0 000.0	20*	3,2	3,6	300	7	21	10	80	50	0,059
AX 01 025.0 000.0	25	3,5	3,9	390	6	18	10	100	50	0,082
AX 01 030.0 000.0	30	3,9	4,4	540	6	18	10	120	50	0,124
AX 01 032.0 000.0	31,8	3,9	4,4	570	6	18	10	130	50	0,129
AX 01 035.0 000.0	35*	3,9	4,5	620	5	15	10	140	50	0,140
AX 01 038.0 000.0	38,1	4,0	4,6	670	5	15	10	155	50	0,210
AX 01 040.0 000.0	40	4,0	4,6	700	5	15	10	160	50	0,219
AX 01 045.0 000.0	45*	4,2	4,7	830	4	12	10	180	50	0,243
AX 01 050.0 000.0	50	4,2	5,2	950	4	12	10	200	50	0,343
AX 01 052.0 000.0	50,8	4,2	5,2	970	4	12	10	200	50	0,348
AX 01 055.0 000.0	55*	4,4	5,4	1080	4	12	9	220	50	0,374
AX 01 060.0 000.0	60	4,5	5,6	1210	4	12	9	240	50	0,505
AX 01 063.0 000.0	63,5	4,6	5,7	1370	4	12	9	260	50	0,535
AX 01 065.0 000.0	65*	4,6	5,7	1450	3	9	9	270	50	0,549
AX 01 070.0 000.0	70	4,6	6,1	1560	3	9	9	280	50	0,588
AX 01 076.0 000.0	76,2	4,6	6,2	1750	3	9	9	310	50	0,764
AX 01 080.0 000.0	80	4,6	6,6	1860	3	9	9	320	50	0,800
AX 01 090.0 000.0	90	4,8	6,8	2190	3	9	9	360	30	0,793
AX 01 100.0 000.0	100	5,3	7,6	2830	3	9	8,5	410	30	0,885
AX 01 102.0 000.0	102	5,3	7,6	2880	3	9	8,5	410	30	0,900
AX 01 105.0 000.0	105*	5,4	7,7	2990	3	9	8,5	430	30	0,925
AX 01 110.0 000.0	110	5,5	7,9	3090	3	9	8,5	450	30	0,963
AX 01 120.0 000.0	120	5,7	8,1	3450	2,5	7,5	8	480	30	1,389
AX 01 125.0 000.0	125*	5,7	8,2	3620	2,5	7,5	8	500	30	1,442
AX 01 127.0 000.0	127	5,7	8,2	3670	2,5	7,5	8	510	30	1,462
AX 01 130.0 000.0	130*	5,8	8,2	4080	2,5	7,5	8	530	30	1,501
AX 01 150.0 000.0	151,5	6,6	9,4	4990	2	6	8	610	20	1,353
AX 01 152.0 000.0	152,4	6,6	9,5	5020	2	6	8	610	20	1,360
AX 01 160.0 000.0	160*	7,2	10,2	5500	2	6	7	660	20	1,429
AX 01 200.0 000.0	200*	9,4	13,5	9670	1,5	4,5	7	850	10	1,797
AX 01 203.0 000.0	203,2*	9,4	13,4	9810	1,5	4,5	7	850	10	1,822
AX 01 250.0 000.0	250*	9,8	14,0	12270	1,2	3,7	7	1500	可定制/On request	
AX 01 254.0 000.0	254*	9,8	14,0	12460	1,2	3,7	7	1500	可定制/On request	
AX 01 300.0 000.0	300*	10,0	14,4	15350	1	3	5	1800	可定制/On request	
AX 01 305.0 000.0	305*	10,1	14,4	15590	1	3	5	1800	可定制/On request	

* 如有需求, 请与我们的销售办公室联系, 以获得更多的信息和数量 / *Available on request, contact our sales office for more info and quantities

以上报告的技术数据均在温度23°C, 50%湿度下测量 / The technical data here reported were measured at 23°C with 50% humidity