


URANO HD SUPER




外壁蓝色PVC，内壁红色耐磨聚酯TPU，防震硬质PVC塑筋螺旋加强。内壁光滑，外壁波纹状；结构坚固，TPU内层壁厚2.2mm；优异的耐磨性能和耐真空性能，优于同类型其他产品。可根据需求定制防静电版本（即在PVC管壁内加黄铜钢丝），也确保管壁外表面的耐磨性能不变。

- 适用于抽吸和输送砂石、水泥、砾石、石料等研磨性介质。

Blue PVC hose with a completely antiabrasive Polyurethane tube, reinforced with an anti-shock rigid PVC spiral. Inside surface smooth, outside slightly corrugated. Very strong with a TPU inner layer up to 2,2 mm. Excellent resistance to abrasion and vacuum, the best of its class. The hose can be manufactured (upon request) in the antistatic version, with a brassed steel wire inside the plastic wall, to meet still better the abrasion resistance requirements even on the external surface.

- Suction and delivery of abrasive materials such as sand, cement, gravels, stones.

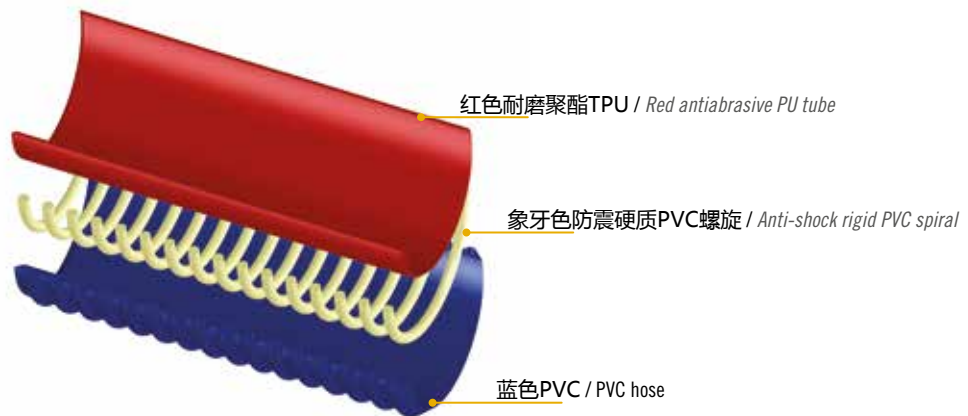

技术参数 / Technical data

代码 Code	内径 ∅ Int.	最小壁厚 Min wall th.	最大壁厚 Max wall th.	重量 Weight	工作压 WP	爆破压 BP	负压 Vac.	弯曲半径 Bending	卷长 Coil lgth.	体积 Vol.
	mm	mm	mm	g/m	bar	bar	m H ₂ O	mm	m	m ³
UH 01 063.0 000.0	63,5*	4,9	6,5	1430	-	-	-	390	50	0,588
UH 01 076.0 000.0	76,2*	5,4	7,2	1910	4,5	13,5	10	470	50	0,699
UH 01 102.0 000.0	102	6,7	9,6	3310	4,0	12	9,5	600	30	0,970
UH 01 127.0 000.0	127	7,1	10,1	4370	3,5	10,5	9,5	750	30	1,766
UH 01 152.0 000.0	152	8,8	12,0	6350	3,0	9	9,5	900	20	1,408

* 如有需求，请与我们的销售办事处联系，以获得更多的信息和数据 / *Available on request, contact our sales office for more info and quantities

以上数据均在温度23°C和相对湿度50%下测量 / The technical data here reported were measured at 23°C with 50% humidity