

EOLO PU AF UL 94




透明聚酯型聚氨酯软管，符合UL 94阻燃标准，象牙色防震硬质PVC螺旋加强；内壁光滑，非常柔韧且轻巧；优异的耐磨性和抗弯曲性；可根据需求提供抗静电版本。

- 抽吸输送研磨性介质，如：粉末，颗粒，木屑和灰尘；也适用于需要阻燃的应用设备中。

Transparent ester based Polyurethane hose, flame retardant according to UL 94, with ivory anti-shock rigid PVC spiral; completely smooth inside, it's very flexible and light. Really good resistance to abrasion and torsion. Antistatic version with copper wire on request.

- *Suction of abrasive media such as powders, granulates, wood shavings and dust and where good self-extinguishing properties are required.*

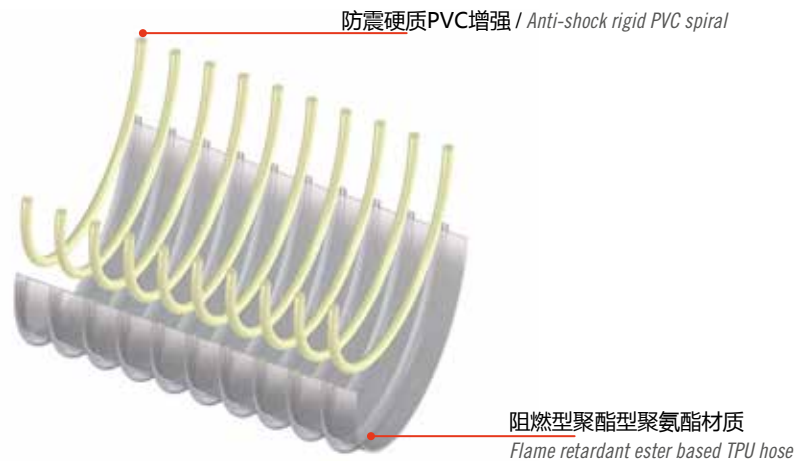

技术参数 / Technical data

代码 Code	内径 Ins. ϕ	最小壁厚 Min wall th.	最大壁厚 Max. wall th.	重量 Weight	耐负压 Vac.	弯曲半径 Bending	每卷长度 Coil lgth.	体积 Vol.
	mm	mm	mm	g/m	m H ₂ O	mm	m	m ³
FF 01 019.0 000.0	19,1*	0,4	2,8	110	2,5	25	20	0,024
FF 01 030.0 000.0	30*	0,4	2,8	160	2,5	35	20	0,051
FF 01 052.0 000.0	50,8*	0,5	3,4	330	2	70	20	0,111
FF 01 060.0 000.0	60*	0,5	3,8	460	1,6	80	20	0,130
FF 01 063.0 000.0	63,5*	0,5	3,9	510	1,6	80	20	0,137
FF 01 080.0 000.0	80*	0,6	4,5	640	1,6	110	30	0,384
FF 01 090.0 000.0	90*	0,6	4,6	740	1,4	125	30	0,429

* 如有需求，请与我们的销售办公室联系，以获得更多的信息和数据 / * Available on request, contact our sales office for more info and quantities

以上技术参数均在温度23°C，50%湿度下测量 / The technical data here reported were measured at 23°C with 50% humidity