



Since 1975


# WASTE MANAGEMENT

废料处理/污水处理

[www.ipl-cn.com](http://www.ipl-cn.com)



AX

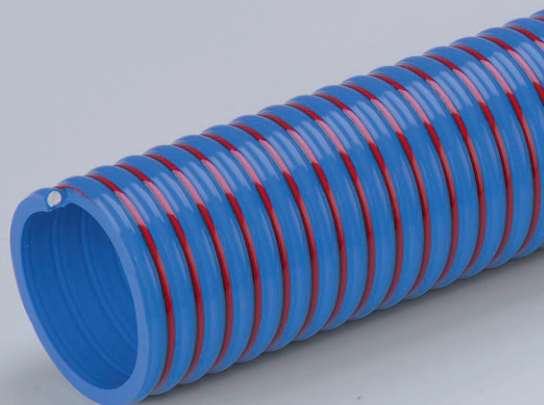

## APOLLO SE

**PVC软管，象牙色防震硬质PVC螺旋增强。**

特别适合在低温下使用；内壁光滑，外壁略微波纹状；柔韧轻巧，抗挤压、耐磨、耐大气性及多种化学品；可定做防静电带铜线版本；抽吸液体废料的理想方案，因其优良的机械特性，特别适合用在罐车上。

**PVC hose reinforced with an anti-shock rigid PVC spiral.** Particularly suitable to be used at low temperatures. Inside surface smooth, light corrugation outside. Strong and flexible, resistant to crushing, abrasion, atmospheric agents and most chemicals. It can be manufactured in antistatic version with copper wire on request. Excellent for suction of liquids in waste management, particularly suitable to be used on tank trucks thanks to its physical- mechanical features.



Ø 19 - 305 mm WP 1-7bar  
Vac. -0.5~-1bar

+60° C  
-25° C

AS



## APOLLO SUPERFLEX

**黑色聚氯乙烯/丁腈橡胶 (PVC/NBR) 软管，象牙色防震硬质PVC螺旋加强。**

因其特殊配方，在极端温度下仍保持弹性，优于同类型PVC软管。可根据需求定制防静电带铜线版本。

适用于废料处理以及农业中液体的抽吸和输送。

**Black PVC/NBR hose, reinforced with an anti-shock rigid PVC spiral.**

Special formulation conceived for keeping the flexibility at extreme temperatures, better than similar PVC hoses commonly used. Antistatic version with copper wire on request.

Waste Management, agriculture: suction and transport of liquids



Ø 25 - 203 mm WP 0.7-3bar  
Vac. -0.5~-0.8bar

+50° C  
-40° C

SF



## APOLLO SUPERFLEX 2

**聚氯乙烯/丁腈橡胶 (PVC/NBR) 软管，防震硬质PVC螺旋增强。**

因其特殊的混合橡胶配方，在低温下仍具有很高的灵活性。外壁略微突出的螺旋，便于在地面上拖动。可用于抽吸输送工业用水及液体，特别适合用在罐车上。可根据需求定制防静电带铜线版本。


**PVC/NBR hose reinforced with an anti-shock rigid PVC spiral.** Its particular mixed rubber nitrilic formulation gives it a high flexibility at extreme low temperatures. Its profile with a slightly protruding spiral guarantees an easy dragging on the ground and an easy and safe connection. Suction and delivery of industrial water and liquids, ideal to be used on tank trucks. Antistatic version with copper wire on request.



Ø 52 - 152 mm WP 0.9-2bar  
Vac. -0.6~-0.7bar

+50° C  
-40° C

A1

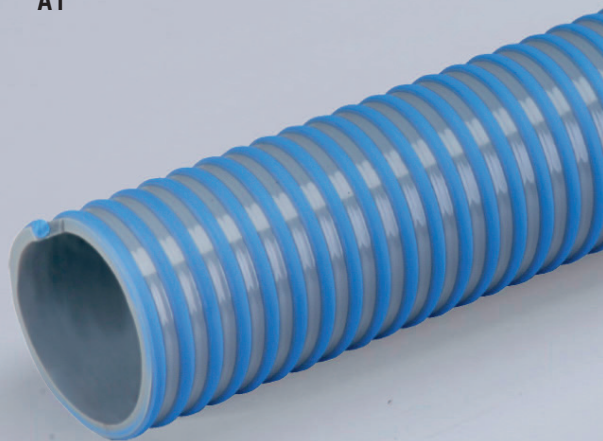

## APOLLO NL 1

NEW

**灰色增塑型PVC高弹性软管，蓝色防震硬质PVC螺旋加强。**

因其特殊配方，即使在低温下也能保持高弹性；外壁突出螺旋，减少的阻力，便于拖动。适用于工业水、泥浆和液体的抽吸和排放；也特别适合在油罐车上使用。

**Grey plasticized PVC hose manufactured with super elastic material and reinforced with anti-shock rigid PVC spiral.**

Special formulation conceived for keeping high flexibility even at low temperatures. Its exposed spiral allows less resistance to dragging. Excellent solution for suction and discharge of industrial water, slurries and liquids; particularly suitable to be used on tank trucks.




WP 1.5-5bar  
Vac. -0.7~-0.8bar



+60° C  
-25° C

Ø 25 - 152 mm

WT

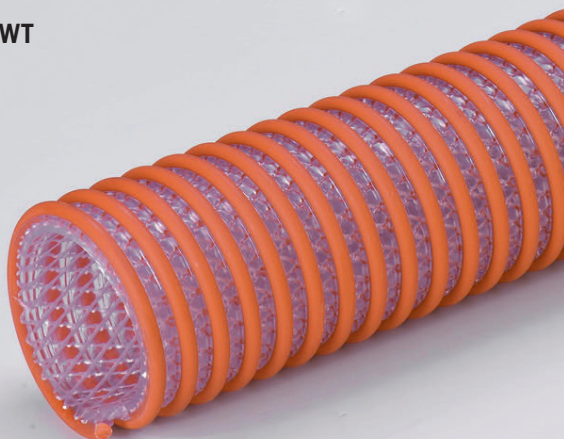

## SPIRALPRESS WT



Cod. SC WT

**增塑型乙烯基化合物软管，橘色防震硬质PVC螺旋和织物双重增强。**

内壁光滑，外壁突出的PVC波纹螺旋，减少阻力，便于在地面拖拽。软管质轻且柔韧，适用于需要良好耐高压的应用场合。可根据要求提供塑筋螺旋。抽吸输送水的理想方案，即使在恶劣的条件下，仍可承受高压。也可应用于租赁泵系统及排水系统。

**Hose made by plasticized vinyl compound with an anti-shock rigid PVC spiral and textile reinforcement.** Completely smooth inside and with an exposed PVC corrugated helix that allows less resistance to dragging. Light and flexible, the hose is suitable for applications where a good resistance to high pressures is required. Banding coil available on request. Excellent solution for suction and delivery of water, conceived to resist at the highest pressures even in severe conditions. Rental pumping systems and for water discharge.




WP 12-30bar  
Vac. -0.8~-0.95bar



+60° C  
-10° C

Ø 38 - 203 mm

MT

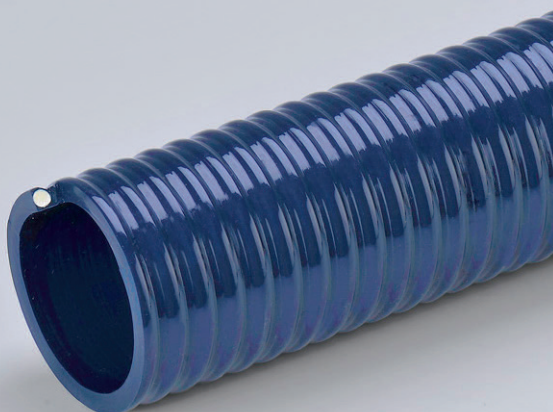

## MARTE A.O.

**特殊防震PVC复合软管，象牙色防震硬质PVC螺旋增强。**

耐磨损、耐老化、耐大气性、耐臭氧。也可根据要求提供防静电带铜线版本。用于液体的抽吸和输送，也包括矿物油、润滑油、原油(石油和柴油)。

**Hose in special antimigration PVC compound reinforced with an anti-shock rigid PVC spiral.**

It's resistant to abrasion, ageing, atmospheric agents and ozone. Available on request also in the antistatic version with copper wire.

For suction and delivery of liquids, also containing mineral oils, lubricants, crude oils (naphta and diesel oil).



WP 2-8bar  
Vac. -0.7~-1bar



+60° C  
-10° C

Ø 19 - 203 mm





**意宝工业软管（上海）有限公司**

Add:上海市嘉定区南翔镇翔江公路485号

Tel: +86 21 59967011 59967015

Fax: +86 21 59967005

Http: [www.ipl-cn.com](http://www.ipl-cn.com)