


# NETTUNO SE




透明PVC软管，防震硬质PVC螺旋增强；内壁光滑，确保优化流动性能，外壁轻微波纹；软管非常柔韧且耐承重；可根据需求定制防静电带铜线版本。

- 适用于输送液体

*Transparent PVC hose with an ivory anti-shock rigid spiral; smooth inside to ensure optimization of flow properties, slightly corrugated outside. Very flexible and resistant to loads. Antistatic version with copper wire on request.*

- *Transport of liquids.*

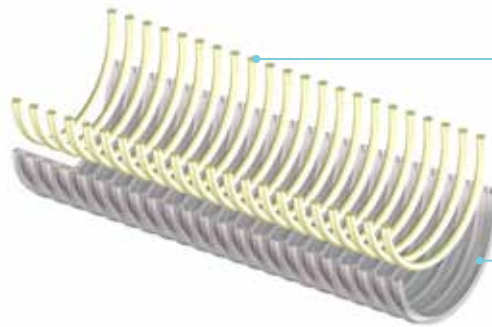

防震硬质PVC螺旋  
Anti-shock rigid PVC spiral

PVC软管 / PVC hose

技术参数 / Technical data

代码 Code	内径 Ins. Ø	最小壁厚 Min wall th.	最大壁厚 Max. wall th.	重量 Weight	工作压力 WP	爆破压力 BP	耐负压 Vac.	弯曲半径 Bending	每卷长度 Coil lgth.	体积 Vol.
	mm	mm	mm	g/m	bar	bar	m H <sub>2</sub> O	mm	m	m <sup>3</sup>
NX NF 013.0 000.0	13*	2,3	2,5	140	3,5	10,5	5	75	50	0,039
NX NF 019.0 000.0	19,1	2,7	3,0	230	3,3	10	5	95	50	0,054
NX NF 020.0 000.0	20	2,7	3,0	240	3,3	10	5	95	50	0,056
NX NF 025.0 000.0	25	2,7	3,0	300	3,3	10	5	110	50	0,078
NX NF 030.0 000.0	30*	2,7	3,0	350	3,3	10	5	130	50	0,115
NX NF 032.0 000.0	31,8	2,8	3,1	390	3,3	10	5	140	50	0,122
NX NF 035.0 000.0	35*	2,8	3,5	440	3,3	10	5	150	50	0,161
NX NF 038.0 000.0	38,1	3,0	3,8	520	3,3	10	5	160	50	0,175
NX NF 040.0 000.0	40	3,0	3,8	550	3,3	10	5	170	50	0,183
NX NF 045.0 000.0	45*	3,2	4,1	670	3,3	10	5	180	50	0,238
NX NF 050.0 000.0	50*	3,4	4,5	810	3,3	10	5	200	50	0,264
NX NF 052.0 000.0	50,8	3,4	4,5	820	3,3	10	5	200	50	0,268
NX NF 055.0 000.0	55*	3,4	4,7	910	3,3	10	5	220	50	0,371
NX NF 060.0 000.0	60*	3,4	4,7	990	3,3	10	5	240	50	0,500
NX NF 063.0 000.0	63,5	3,5	4,7	1060	3,3	10	5	250	50	0,525
NX NF 065.0 000.0	65*	3,6	4,8	1120	3,3	10	5	250	50	0,537
NX NF 070.0 000.0	70*	3,7	5,1	1220	3,3	10	5	270	50	0,693
NX NF 076.0 000.0	76,2	3,9	5,3	1390	3,3	10	5	290	50	0,750
NX NF 080.0 000.0	80*	4,2	5,6	1540	3,0	9	5	310	50	0,934
NX NF 090.0 000.0	90*	4,5	6,0	1880	3,0	9	5	360	30	0,783
NX NF 100.0 000.0	100*	4,8	6,4	2200	3,0	9	5	400	30	0,866
NX NF 102.0 000.0	102	4,8	6,4	2240	3,0	9	5	400	30	0,882
NX NF 110.0 000.0	110*	5,1	6,8	2570	3,0	9	4	440	30	1,266
NX NF 120.0 000.0	120*	5,1	6,8	2790	2,0	6	4	550	30	1,069
NX NF 127.0 000.0	127*	5,2	7,0	3040	2,0	6	3	580	30	1,692
NX NF 150.0 000.0	151,5*	6,2	8,3	4390	2,0	6	3	660	20	1,345
NX NF 152.0 000.0	152,8*	6,2	8,3	4420	2,0	6	3	660	20	1,352
NX NF 200.0 000.0	200*	6,5	10,0	6420	1,5	4,5	2	850	10	2,130
NX NF 203.0 000.0	203,2*	6,5	10,0	6520	1,5	4,5	2	850	10	2,161
NX NF 250.0 000.0	250*	6,8	10,5	8470	1,2	3,5	2	1500	待定 /On request	
NX NF 300.0 000.0	300*	7,3	11,3	11120	0,8	2,5	2	1700	待定 /On request	

\* 如有需求，请与我们的销售办公室联系，以获得更多的信息和数据 / \* Available on request, contact our sales office for more info and quantities

以上的报告技术数据均在温度23°C，50%湿度下测量的 / The technical data here reported were measured at 23°C with 50% humidity