

# ZEUS PU EST



**CN** 透明酯基TPU螺旋软管，深灰色抗震硬质PVC螺旋线增强。壁厚在1.2mm-2.0mm之间。

完美的光滑外层使介质流动性最大化。良好的耐磨性、耐曲折性。根据要求，可提供铜丝增强(Cod. OZ 02)版本。


- 输送粉尘、碎片及高磨性颗粒。特别适用于塑料、陶瓷和木工行业等环境恶劣的场合。

**EN** **Transparent, ester-based TPU spiral hose, reinforced with dark grey, anti-shock rigid PVC spiral.** Wall thickness from 1,2 mm to 2,0 mm. The perfectly smooth inner surface guarantees maximum flow. Good resistance to abrasion and bending. On request, it is available in AS version with copper wire (Cod. OZ 02).


- Transport of dust, chips and highly abrasive granules. Particularly suitable for the plastics, ceramics and woodworking industries under severe conditions of use.

**型号. OZ**  
Ø mm 30-102

抗震硬质PVC螺旋线增强  
Anti-shock rigid PVC spiral

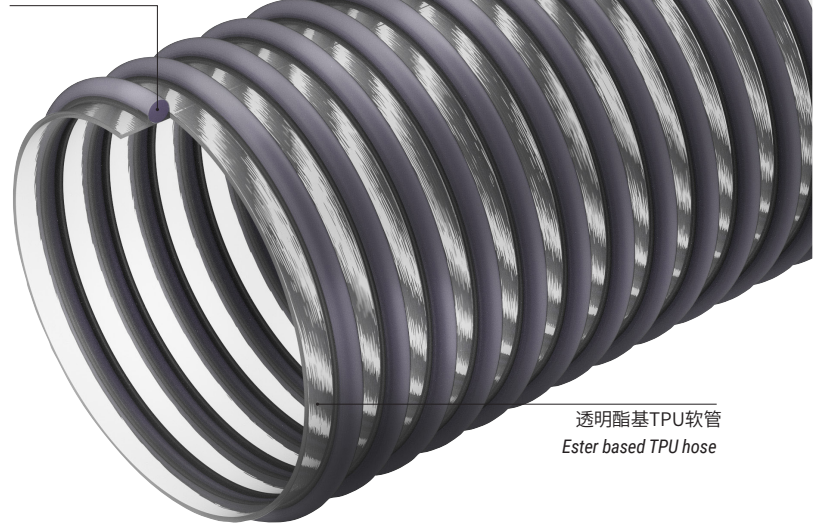

透明酯基TPU软管  
Ester based TPU hose

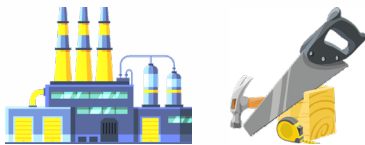

技术参数 · TECHNICAL DATA	型号	内径	最小壁厚	最大壁厚	重量	耐负压	弯曲半径	每卷长度	体积
	CODE	Ø INT.	MIN WALL TH.	MAX WALL TH.	WEIGHT	VACUUM	BENDING	COIL LGTH.	VOL.
		mm	mm	mm	g/m	m H <sub>2</sub> O	mm	m	m <sup>3</sup>
<p>同系列产品 ITEMS IN THE SAME SERIES</p> <p>EOLO PU EST (cod. OU 01) p.31</p> <p>EOLO PUP EST (cod. OP) p.33</p>	OZ010300000000*	30	1,2	3,7	340	9	130	30	0,07
	OZ010320000000*	31,8	1,2	3,7	360	9	140	30	0,08
	OZ010350000000*	35	1,3	3,9	400	9	160	30	0,08
	OZ010380000000*	38,1	1,3	3,9	440	9	180	30	0,12
	OZ010400000000*	40	1,5	4,2	530	9	190	30	0,12
	OZ010450000000*	45	1,5	4,3	610	8	200	30	0,15
	OZ010520000000*	50,8	1,5	4,7	730	8	215	30	0,17
	OZ010600000000*	60	1,5	4,9	910	8	230	30	0,30
	OZ010630000000*	63,5	1,5	4,9	960	8	240	30	0,32
	OZ010650000000*	65	1,5	4,9	980	8	240	30	0,32
	OZ010700000000*	70	1,5	5,2	1020	8	250	30	0,35
	OZ010760000000*	76,2	1,7	5,4	1190	8	270	30	0,38
	OZ010800000000*	80	2	6	1400	7	290	30	0,40
	OZ010900000000*	90	2	6	1570	7	380	30	0,59
	OZ011000000000*	100	2	6,3	1740	7	420	30	0,65
OZ011020000000*	102	2	6,3	1770	7	420	30	0,66	

\*如有需求，请与我们的销售办公室联系，以获得更多的信息和数据。

\*Available on request, contact our sales office for more info and quantities.

以上报告的技术数据均在温度23°C，50%湿度下测量。

The technical data here reported have been measured at 23°C with 50% umidity.

本公司保留随时更改产品规格及停止生产的权利，恕不另行通知。

We reserve the right either to alter specifications and discontinue products without prior notice